


GRIZZLY FEEDERS – PG SERIES

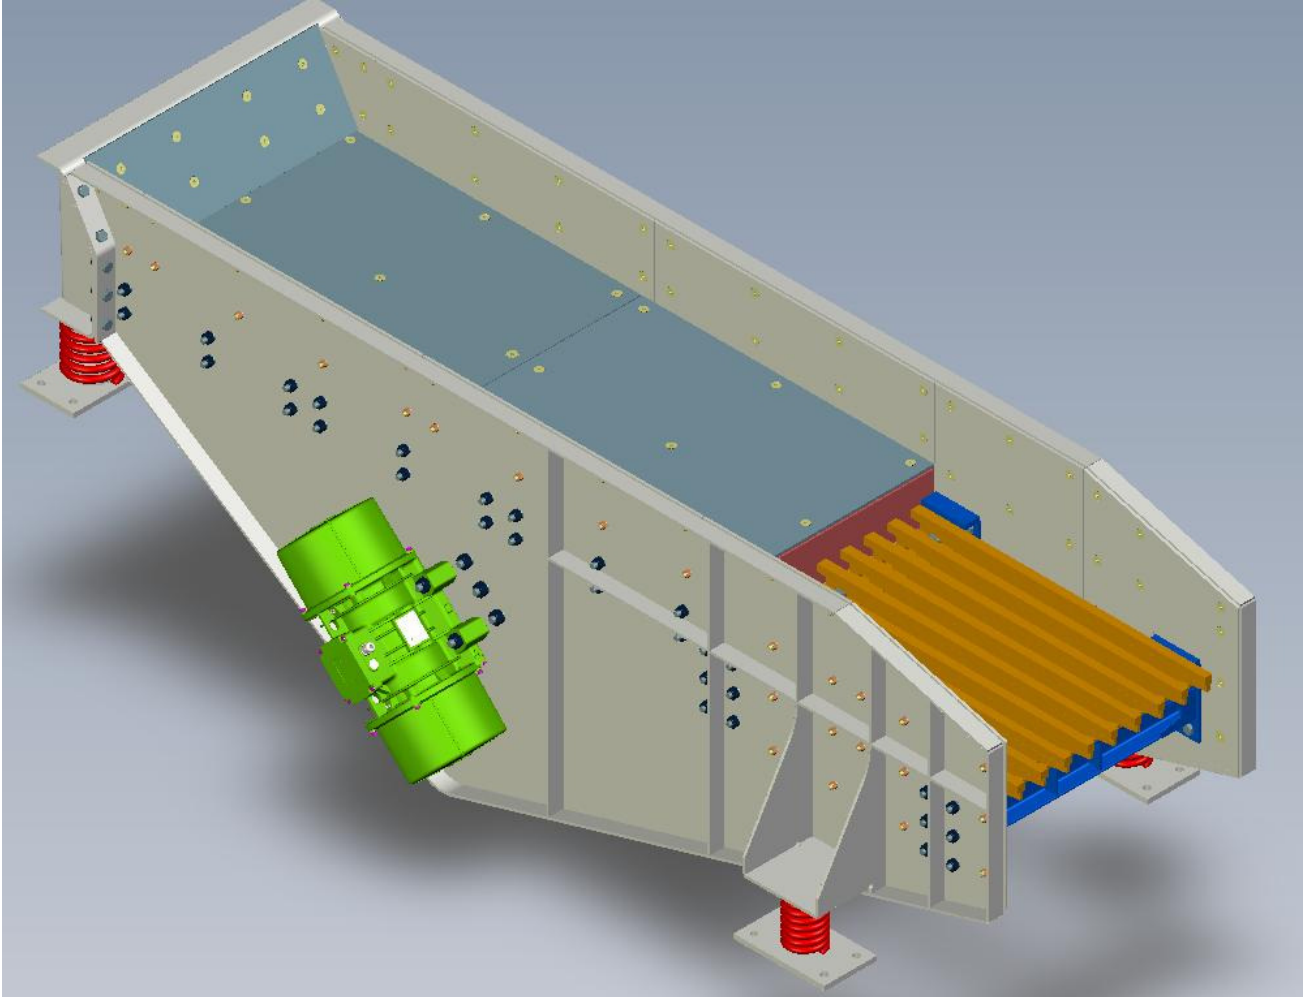

TECHNICAL SPECIFICATION:

Feeder	WxL [m]	Capacity [t/h]	Grizzly		Power [kW]	Weight [kg]
			LENGHT [m]	AREA [m2]		
PG10030	1.0x3.0	500	0.9	0.9	2 x 7.5	3500
PG12030	1.2x3.0	650	0.9	1.1	2 x 7.5	3800
PG15030	1.5x3.0	800	0.9	1.4	2 x 7.5	4500
PG18030	1.8x3.0	900	0.9	1.6	2 x 10.5	5200
PG2130	2.1x3.0	1200	0.9	1.9	2 x 10.5	6000
PG24030	2.4x3.0	1300	0.9	2.2	2 x 10.5	6700
PG10045	1.0x4.5	500	1.2	1.2	2 x 7.5	4500
PG12045	1.2x4.5	650	1.2	1.5	2 x 10.5	5300
PG15045	1.5x4.5	800	1.2	1.8	2 x 10.5	6000
PG18045	1.8x4.5	950	1.2	2.1	2 x 10.5	6750
PG21045	2.1x4.5	1200	1.2	2.5	2 x 18.5	8200
PG24045	2.4x4.5	1350	1.2	2.9	2 x 18.5	9000
PG10060	1.0x6.0	500	2x0.9	1.8	2 x 10.5	6000
PG12060	1.2x6.0	650	2x0.9	2.2	2 x 10.5	7000
PG15060	1.5x6.0	800	2x0.9	2.7	2 x 14	8000
PG18060	1.8x6.0	950	2x0.9	3.3	2 x 18.5	10500

Feeder can be modified to accomodate customer requirements. For different size or custom made feeder please contact VIBFEM Pty Ltd.

Vibratory Motors – option to redesign feeders to use client specified motors.